


Alta generación de energía

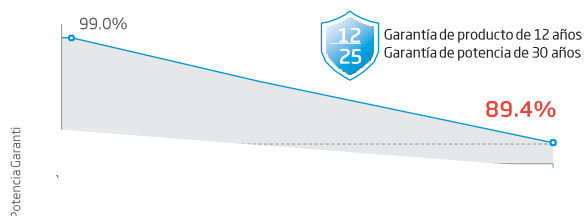

INFORMACIÓN ELÉCTRICA(STC)

Máxima Potencia W- P _{MPP} (Wp)*	600	605	610	615	620	625	630
Tolerancia de Potencia (W)**	0 ~ +5						
Voltaje de Máxima Potencia - V _{MPP} (V)	40.3	40.5	40.8	41.1	41.4	41.6	42.0
Corriente de Máxima Potencia - I _{MPP} (A)	14.91	14.94	14.96	14.98	14.99	15.00	15.01
Voltaje de Circuito Abierto - V _{OC} (V)	48.4	48.7	49.0	49.3	49.6	49.8	50.3
Corriente de Corto Circuito-ISC (A)	15.80	15.83	15.86	15.89	15.91	15.93	15.94
Eficiencia de Módulo m (%)	22.2	22.4	22.6	22.8	23.0	23.1	23.3

STC: Irradiancia 1000W/m², Temperatura de Celda 25°C, Masa de Aire AM1.5.
 *Tolerancia de medidas ±3%. **Tolerancia de Potencia: +3%.

INFORMACIÓN ELÉCTRICA(NOCT)

Máxima Potencia W- P _{MAX} (Wp)*	459	462	466	470	474	477	482
Voltaje de Máxima Potencia - V _{MPP} (V)	37.9	38.1	38.3	38.6	38.8	39.0	39.4
Corriente de Máxima Potencia - I _{MPP} (A)	12.11	12.13	12.16	12.19	12.20	12.21	12.23
Voltaje de Circuito Abierto - V _{OC} (V)	46.0	46.2	46.5	46.8	47.1	47.3	47.6
Eficiencia de Módulo m (%)	12.73	12.75	12.78	12.80	12.82	12.84	12.85


NOCT: Irradiancia 800W/m², 20°C, Temperatura Ambiente 1m/s.

CURVAS DE MÓDULOS

CURVAS I-V DEL MÓDULO (620W)

Current (A)


CURVAS P-V DEL MÓDULO (620W)

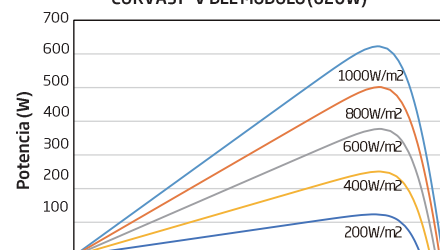

30

1134

2382

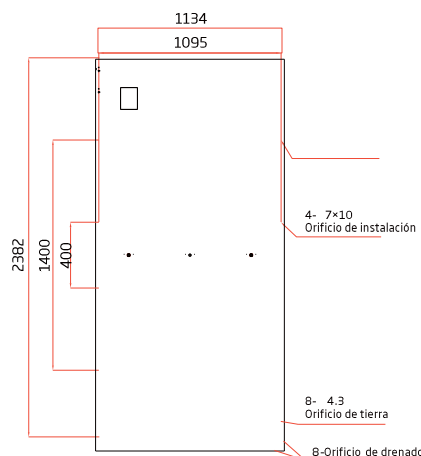

B-B